


TFT 5

Größe: 140 x 100 x 23 (L x B x H) in mm

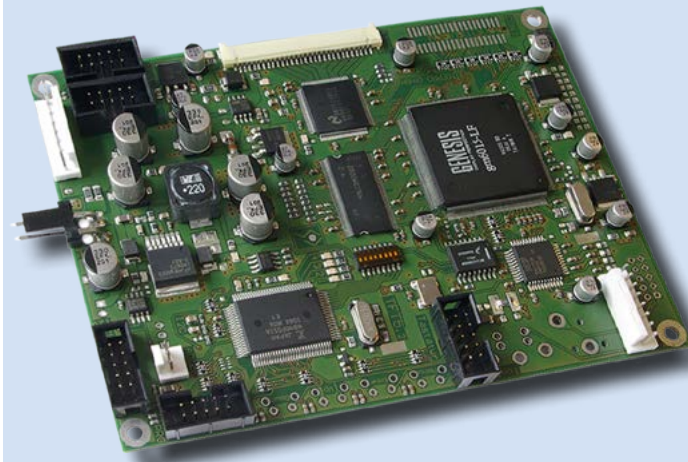

Beschreibung:

- For easy plug+display connections of flatpanels to Video (PAL/NTSC/[SECAM])
- Output for TTL and LVDS Displays **up to SXGA (1366x768)**
- Highest picture quality by improved scaling algorithm
- Simply Flatpanel configuration via jumper (no external software)
- Single 12V power supply

Durch unsere eigene Entwicklung und Fertigung sind kundenspezifische Änderungen ab 1 Stk. nach Absprache möglich. Preise auf Anfrage.

Technische Daten:

- One product for different resolution up to SXGA (1366 x 768)
- Color depths up to 24bits
- Optional Video: FBAS(max. 4), Y/C (max. 2)
- Advanced Scaling, horizontal/vertical zoom and shrink
- On-Screen Display, 4-button user interface, OSD control for all features
- High power connector for power supply and backlight converter (12V and 5V)
- Cable-Kits for flatpanels
- Backlight dimming, analog + PWM
- Dimensions: 140mm x 100mm
- Power supply: only 12V= +/- 10%
- Storage Temp. -25°C to +60°C
- Operating Temp. -10°C (-25°C) to +50°C
- Ambient Humidity 10 to 90% RH
- Storage Humidity 10 to 90% RH



Auch als TFT-Kit lieferbar, ab 1 Stk.