

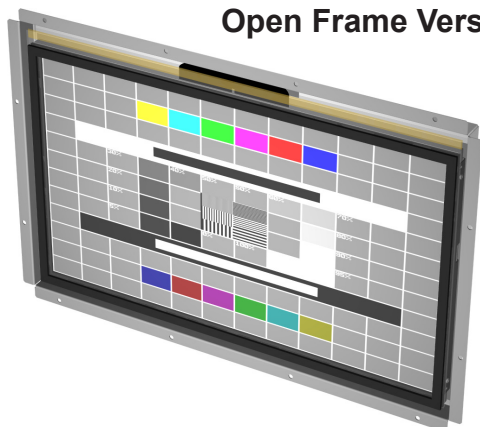
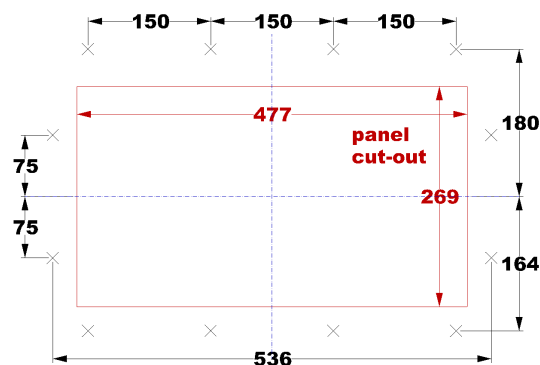


LCD21WF-PCT

Open Frame Vers. PCT

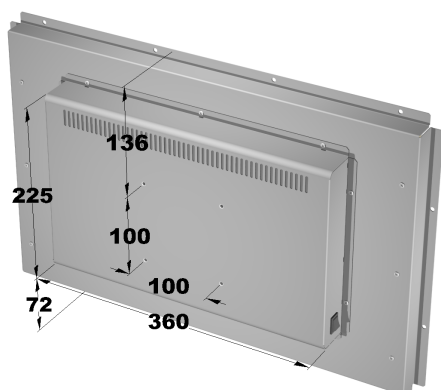

- Projected capacitive touchscreen

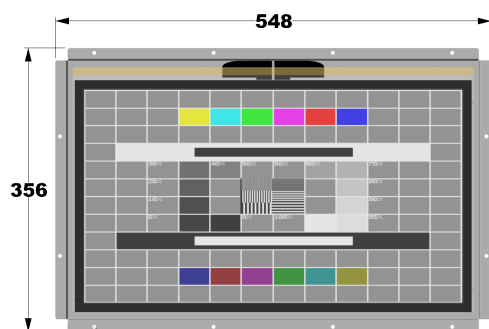

Specifications

LCD Panel

Display Type	21.5" TFT LCD
Resolution	1920 x 1080
Colors	16.7M
Brightness	250cd/m ² (typ.)
Viewing Angle	178° H, 178° V (typ.)

Interface

VGA Input	HD-Sub 15pin, DVI
<i>option</i>	Video Input - Composite, S-Video, PAL/NTSC, SDI
OSD Control	Brightness, Contrast, Phase, Size, Sharpness, Auto Adjust, etc.

Touchscreen

Projected capacitive	USB/ RS232
----------------------	------------

Mechanical

Construction	Steel chassis
Dimension	548 x 356 x 70.5mm
Mounting	Chassis mount 12 x Ø5mm VESA 100 x 100mm (4 x M4)

Electrical

Power Supply	115/230V AC, 50/60Hz
<i>option</i>	12V, 24V, 48V DC

Environmental

Temperature	Operating 0°C to 45°C Storage -20°C to 60°C
Humidity	max. 90% RH, non condensing

Options

AC adapter	
<i>other options on request</i>	

Accessories (included)

Power-cord, VGA-cable, DVI-cable	
----------------------------------	--