

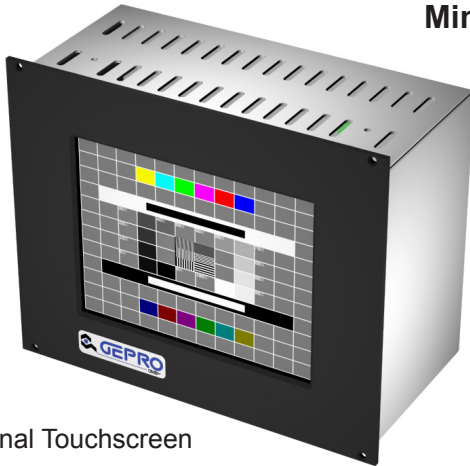


## LCD6M Minifront

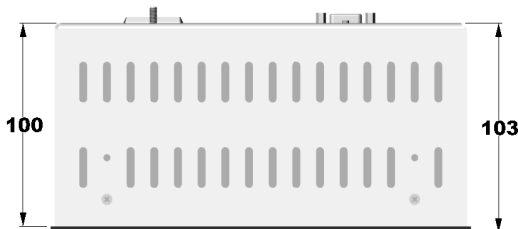

• Optional Touchscreen

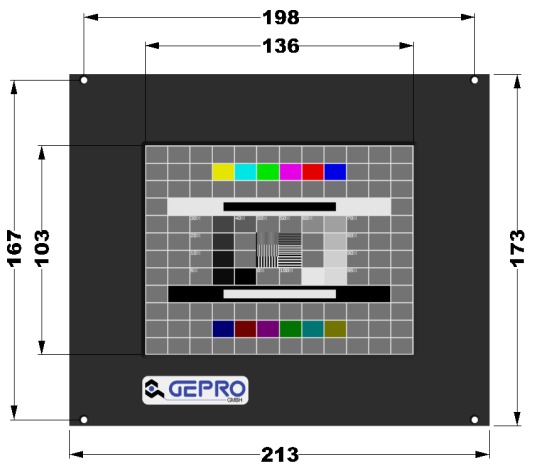

## Specifications

### LCD Panel

Display Type	6.5" TFT LCD
Resolution	640 x 480
	<i>option</i> 1024 x 768
Colors	262k
Brightness	250cd/m <sup>2</sup> (typ.)
	<i>option</i> up to 600cd/m <sup>2</sup> (typ.)
Viewing Angle	130° H, 110° V (typ.)
	<i>option</i> 160° H, 160° V (typ.)

### Interface

VGA Input	HD-Sub 15pin, DVI
	<i>option</i> Video Input - Composite, S-Video, PAL/NTSC, SDI
OSD Control	Brightness, Contrast, Phase, Size, Sharpness, Auto Adjust, etc.

### Mechanical

Front Color	Aluminium front panel powder coated, aluminium/ steel chassis
Front Dimension	RAL 9005, 7035, 7032, 9006, etc.
Cover Dimension	213 x 173 x 3mm
Mounting	209 x 155 x 100mm
Protection	Panelmount (4 x Ø3.2mm)
	IP41 on frontside
	<i>option</i> Anti glare protection glass (IP65 on frontside)

### Electrical

Power Supply	115/230V AC, 50/60Hz
	<i>option</i> 12V, 24V, 48V DC

### Environmental

Temperature	Operating 0°C to 45°C
	Storage -20°C to 60°C
Humidity	max. 90% RH, non condensing

### Options

Touchscreen  
AC adapter  
Customized front plate  
**other options on request**

### Accessories (included)

Power-cord, VGA-cable, DVI-cable