Multi-Signal-Box

MSB

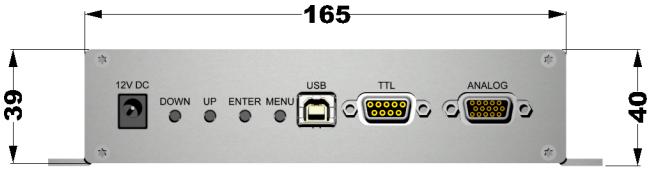

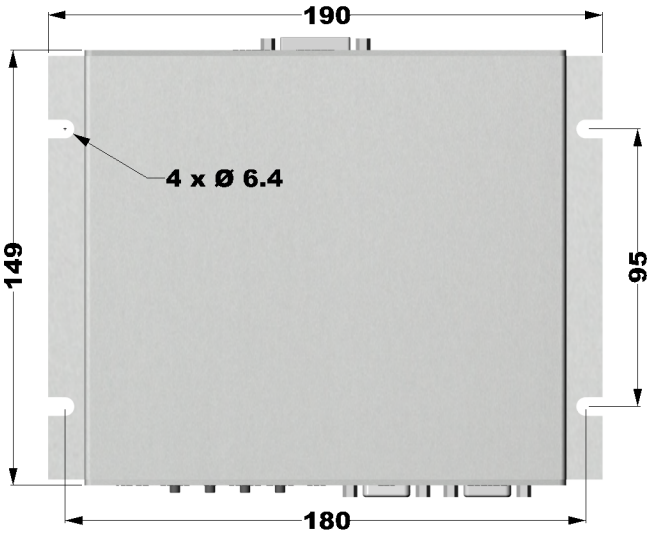

Specifications

Interface Input

VGA Input	HD-Sub 15pin
TTL Input	D-Sub 9pin
H-Frequencey	10kHz ... 120kHz
V-Frequency	20Hz ... 130Hz
Synchronization	H/V, CSync, SOG
OSD Control	Brightness, Contrast, Phase, Size, Sharpness, Auto Adjust, etc.

Interface Output

VGA/ DVI Output	DVI-I
Resolution	VGA ... WSXGA+ (1680 x 1050)

Programming

Firmware-update via USB-B

Mechanical

Construction	Aluminium case
Dimension	190 x 149 x 40mm

Electrical

Power Supply	12V DC/ 0,6A (typ.)

Environmental

Temperature	Operating	0°C to 45°C
	Storage	-20°C to 60°C

Accessories (included)

AC Adapter
Cable VGA to 5 x BNC
Cable DVI-D to DVI-D
Cable DVI-A to HD-Sub 15pin

Dimensions in mm

All rights reserved. Specifications subject to change without prior notice

GEPRO GMBH
Tel. +49 (0) 2772 5755730
Fax. +49 (0) 2772 63779
Neue Strasse 12
35756 Mittenaar
vertrieb@gepro-gmbh.de
www.gepro-gmbh.de