


PPC32WOC-8K Wallmount Vers.1



- Projected Capacitive Touchscreen
- Optional IP65 all around (waterproof)
- Optional wide temperature operating

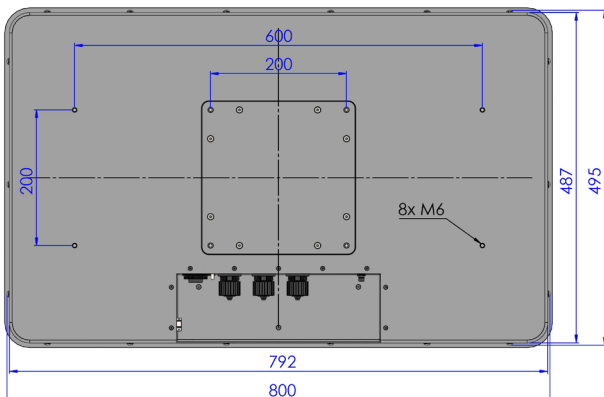

Specifications

LCD Panel

Display Type	32" TFT LCD
Resolution	1920 x 1080
Colors	16.7M
Brightness	500cd/m ² (typ.)
<i>option</i>	High Brightness (1000cd/m ² , typ.)
Viewing Angle	178° H, 178° V (typ.)

PC System

Processor/ Memory	Intel® Celeron® J1900, 4x 2.0GHz up to 8GB RAM
<i>option</i>	Intel® Celeron® J4105, 4x 1.5GHz up to 8GB RAM
<i>option</i>	Intel® Core™ i3, i5, i7, 6th/8th Gen. up to 16GB RAM
Storage	Solid State Disk, up to 1TB
<i>option</i>	2,5" HDD, up to 1TB
I/O Port	1 x LAN 2 x USB 2.0
	more/ other I/O-Ports on request

Mechanical

Construction	Powder coated aluminum front panel with recessed protection glass and PCAP touch screen, powder coated aluminium chassis
Color	RAL 9005, 7035, 7032, 9006, etc.
Front Dimension	806 x 501 x 10mm
Cover Dimension	792 x 487 x 106mm, (w/o screws)
Mounting	VESA 600 x 200mm (8 x M6)

Electrical

Power Supply	115/230V AC, 50/60Hz
<i>option</i>	24V, 48V DC

Environmental

Temperature	Storage -20°C to 60°C Operating 0°C to 45°C
Humidity	max. 90% RH, non condensing

Options

Operating System	Microsoft® Windows® 7 Pro ¹ Microsoft® Windows® 10 Pro Microsoft® Windows® Embedded Linux®
WLAN	802.11ac, 802.11a/b/g/n
Waterproof	IP65 all around
Wide Temperature	Operating -20°C to 50°C
AC adapter	
	other options on request

Accessories (included)

Power-cord	
Waterproof LAN-Cable-Connector	

¹ with Intel® Celeron® processor only

Intel®, Celeron®, Pentium®, Intel® Core™ and Intel® Atom™ are trademarks of the Intel Corporation in the U.S. and other countries. Linux® is the registered trademark of Linus Torvalds in the U.S. and other countries. Microsoft® and Windows® are trademarks of the Microsoft® Corporation in the U.S. and other countries.

Dimensions in mm

9G

All rights reserved. Specifications subject to change without prior notice