


# 12.1" LCD-TFT-Monitor LCD12 Minifront L

Machine Building  
Measurement  
Control Engineering  
Visualization  
Broadcast  
CAD  
POS / POI

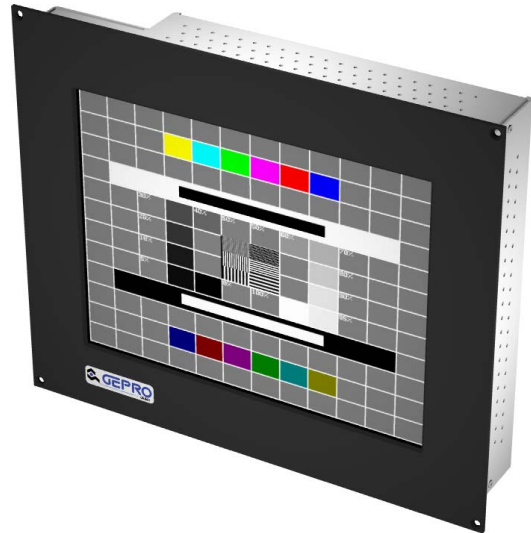

## LCD Panel

Display Type	TFT-Panel, diff. manufacturers
Resolution	800 x 600, opt. 1024 x 768
Colors	262k, 18bit
Display Area	245.9mm x 184.4mm
Brightness	300 Cd/m <sup>2</sup>
Contrast	200 - 500 : 1
Response Time	25ms, T <sub>r</sub> + T <sub>f</sub>
Viewing Angle	160° H, 160° V

## Interface

VGA Input	HD-Sub 15pin
	DVI (opt.)
Video Input	Composite, S-Video, PAL / NTSC
	SDI (opt.)

## OSD Control

PC	Auto adjust, Manual adjust
Video	Auto adjust, Manual adjust

## Electrical

Power Supply	115-230V AC, 50-60Hz
--------------	----------------------

## Mechanical

Front Dimension	337 x 280 x 3mm
Cover Dimension	317 x 259.5 x 60mm
Front Color	RAL 7032, 7035, 9005
Weight	TBD

## Environmental



Temperature	0°C to 50°C Operating -20°C to 60°C Storage
Humidity	max. 90% RH, non condensing

## Accessories

Standard	VGA-cable, power-cord
----------	-----------------------

## Option

Protection Glass	anti glare
Touch Screen	resistive, capacitive
	RS232, USB
Power Supply	12V DC / 2A 24V DC / 1A AC Adapter
Audio	2 Loudspeaker, 5W

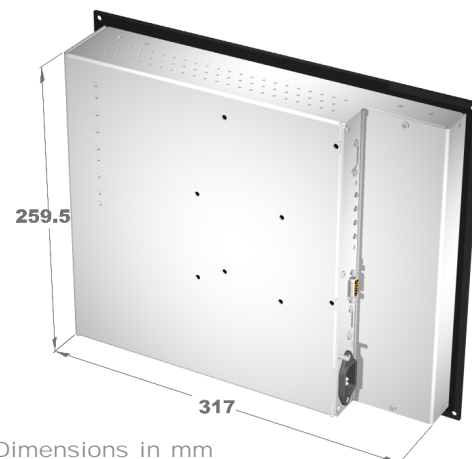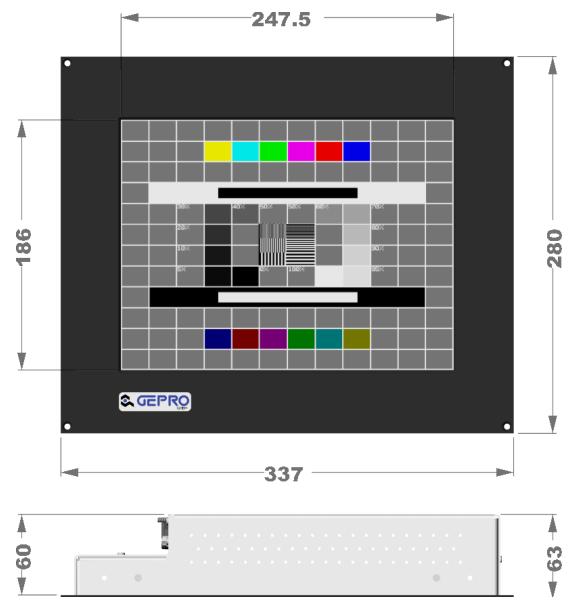

Dimensions in mm

All rights reserved. Specifications subject to change without prior notice



**GEPRO**  
GMBH

Neue Strasse 12  
35756 Mittenaar

Tel. +49 (0) 2772 64216  
Fax. +49 (0) 2772 63779

gepro@t-online.de  
www.gepro-gmbh.de