


19" LCD-TFT-Monitor LCD19 Minifront

Machine Building
Measurement
Control Engineering
Visualization
Broadcast
CAD
POS / POI

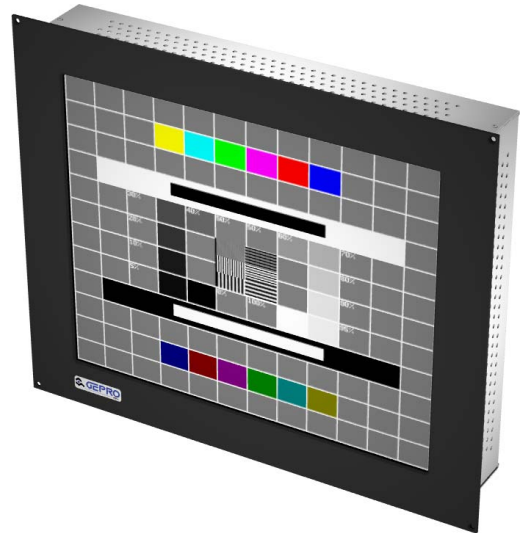

LCD Panel

Display Type	TFT-Panel, diff. manufacturers
Resolution	1280 x 1024
Colors	16.7million, 24bit
Display Area	376.8mm x 301.4mm
Brightness	250 Cd/m ²
Contrast	500 : 1
Response Time	25ms, T _r + T _f
Viewing Angle	170° H, 170° V

Interface

VGA Input	HD-Sub 15pin
	DVI (opt.)
Video Input	Composite, S-Video, PAL / NTSC
	SDI (opt.)

OSD Control

PC	Auto adjust, Manual adjust
Video	Auto adjust, Manual adjust

Electrical

Power Supply	115-230V AC, 50-60Hz
--------------	----------------------

Mechanical

Front Dimension	482.6 x 399.2 x 3mm
Cover Dimension	447 x 367.5 x 80mm
Front Color	RAL 7032, 7035, 9005
Weight	TBD

Environmental



Temperature	0°C to 50°C Operating -20°C to 60°C Storage
Humidity	max. 90% RH, non condensing

Accessories

Standard	VGA-cable, power-cord
----------	-----------------------

Option

Protection Glass	anti glare
Touch Screen	resistive, capacitive
	RS232, USB
Power Supply	12V DC / 6A 24V DC / 3A
	AC Adapter
Audio	2 Loudspeaker, 5W

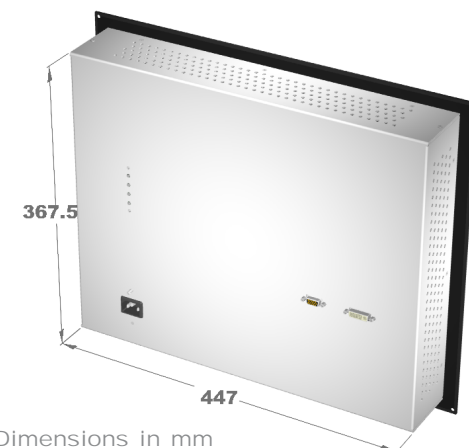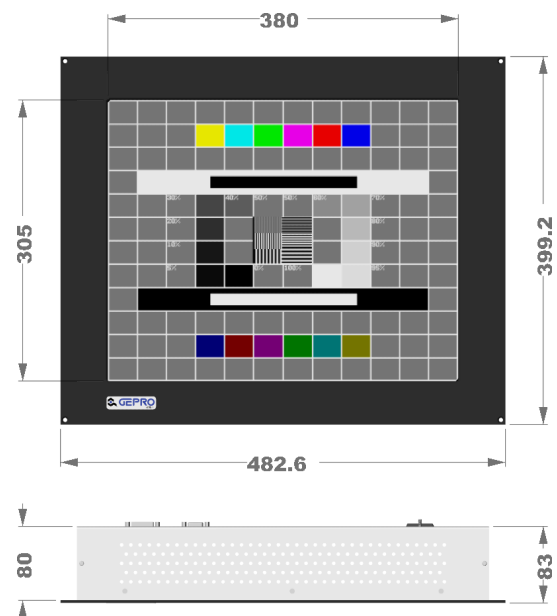

Dimensions in mm

All rights reserved. Specifications subject to change without prior notice



GEPRO
GMBH

Neue Strasse 12
35756 Mittenaar

Tel. +49 (0) 2772 64216
Fax. +49 (0) 2772 63779

gepro@t-online.de
www.gepro-gmbh.de