

10.4" Panel-PC LX10 Minifront F

Machine Building
Measurement
Control Engineering
Visualization
Broadcast
CAD
POS / POI



LCD Panel

Resolution	800x600
Colors	262k, 18 Bit
Display Area	211.2mm x 158.4mm
Brightness	250 Cd/m ²
Contrast	400 : 1

CPU

AMD® Geode™ LX800	500 MHz fanless
----------------------	-----------------

Memory

DDR RAM	512 MB, optional up to 1 GB
---------	-----------------------------

Drives

Compact Flash	2 GB, optional up to 16 GB
---------------	----------------------------

Operating System

Microsoft® Windows® XP Embedded

I/O

LAN	1 x 10/100 Mbits/s
Serial Port	1 x
USB 2.0	4 x
VGA	extern (Dual Monitoring)
PS/2	Mouse / Keyboard

Electrical

Power Supply	12V DC, 1,2A typ.
--------------	-------------------

Mechanical



Front Dimension	295 x 238 x 3mm
Cover Dimension	269 x 215 x 50mm
Front Color	RAL 7032, 7035, 9005

Environmental

Temperature	0°C to 50°C Operating -20°C to 60°C Storage
Humidity	max. 90% RH non cond.

Option

Protection Glass	Anti glare
Touch Screen	resistive
	RS232, USB

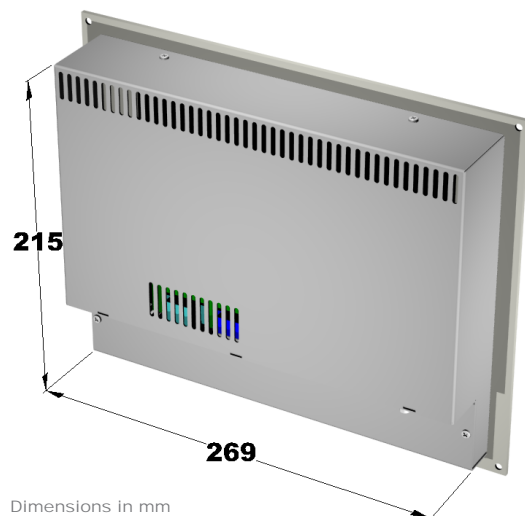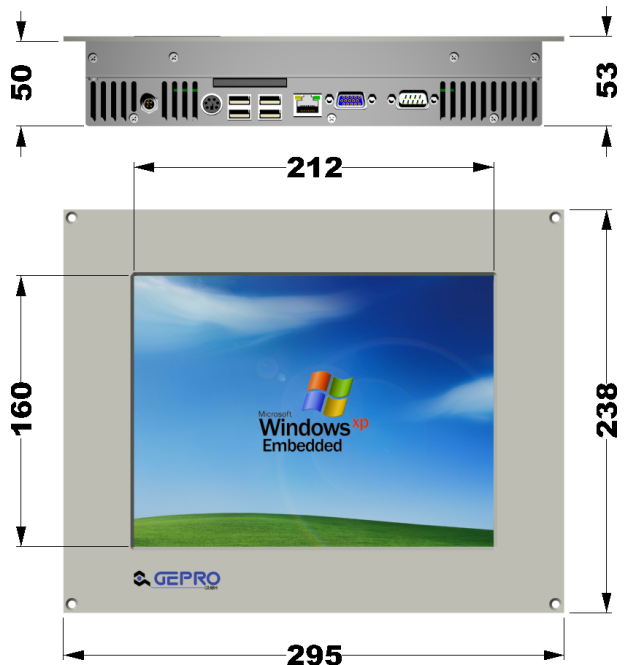

Dimensions in mm

All rights reserved. Specifications subject to change without prior notice



Neue Strasse 12
35756 Mittenaar

Tel. +49 (0) 2772 64216
Fax. +49 (0) 2772 63779

gepro@t-online.de
www.gepro-gmbh.de